

MODEL NO.	GALLONS STORAGE	DIMENSIONS IN INCHES										WATER INLET, OUTLET, RETURN (NPT)	APPROX. SHIPPING WEIGHT (Lb)
		A	B	C	D	E	F	G	H	J	K		
LC250S	250	50	69.50	3.56	17.88	40.13	31	56	29.25	56.31	52.50	2-1/2"	1000
LC500S	500	60.19	82.75	3.93	21.25	52.88	31	66	38.75	66.38	62.50	2-1/2"	1600
LC750S	750	71	90.13	4.63	23.25	57.88	40	78	45.38	77.25	74.50	2-1/2"	1875
LC1000S	1000	81.19	89.88	4.19	24.56	55.19	47	88	55	87.31	84.50	2-1/2"	2900

NOTES:

1. JACKET PENETRATIONS:

FRONT: INLET, OPTION, DRAIN, RELIEF, 2 THERMOWELLS, ASME DATA PLATE (ACCESSIBLE) 150PSI WORKING PRESSURE (225PSI HYDROTEST)



TOP: OUTLET

BACK: MANWAY, PROCESS FITTING (2IN BOTH ACCESSIBLE)


THERMOWELL DIAMETER 3/4", ALLOWS FOR A 1/4" PROBE AND TWO 4MM OPENINGS.

CONNECTION 3/4" NPT

2. TANK SUPPLIED WITH WATTS LF140X9. ASME RELIEF CAPACITY 3,085,000 BTU/HR @ 150 PSI
CSA RELIEF CAPACITY 670,000 BTU/HR

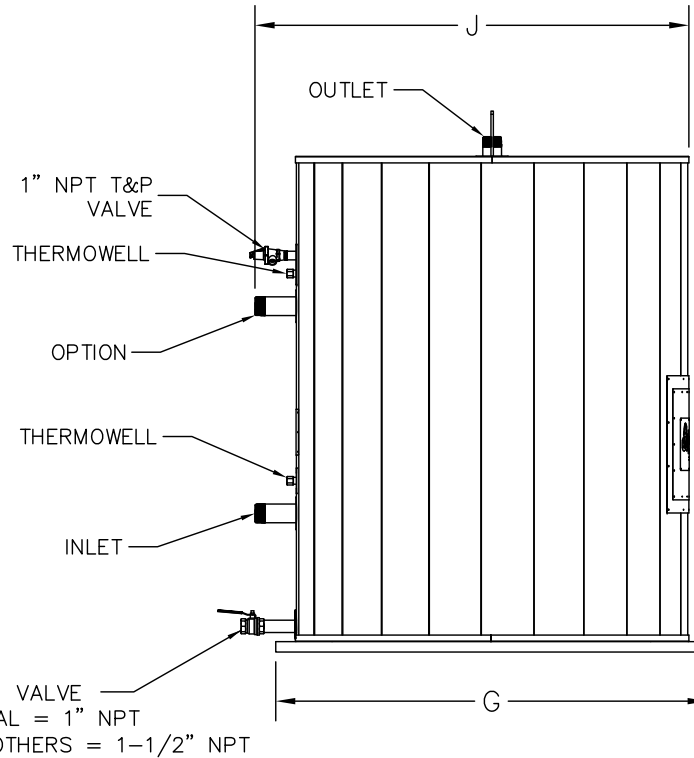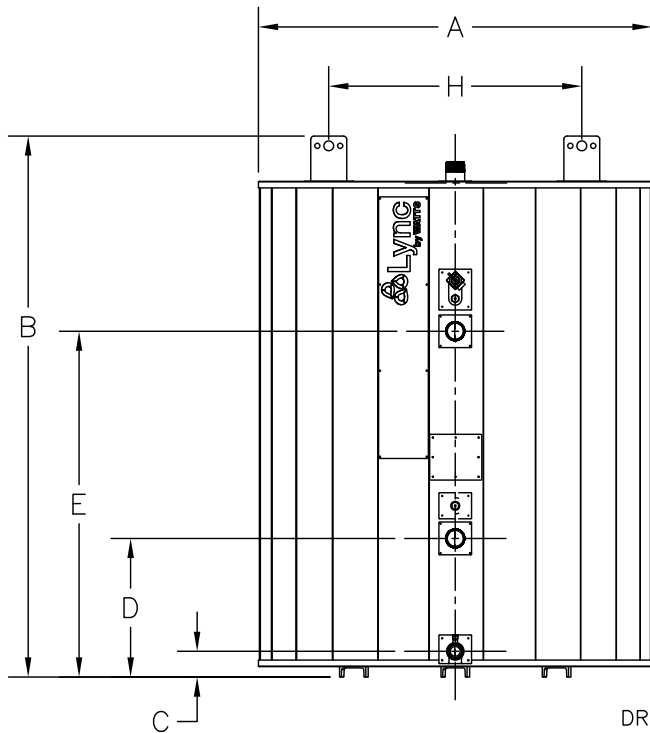

DRAIN VALVE
250GAL = 1" NPT
ALL OTHERS = 1-1/2" NPT

		Blauvelt, NY Fort Worth, TX
LYNC STORAGE TANK DIMENSIONAL DRAWING		
DWN.BY <u>K.S.</u> DATE <u>120920</u> SCALE <u>NTS</u> REV.BY <u>K.S.</u> DATE <u>111723</u>	AP-L-1061	REV. F