


Use RS485 port for:
 - MODBUS RTU
 - BACNet MSTP

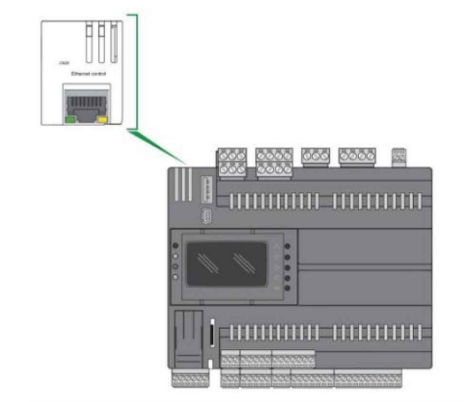

Use the Ethernet port on the top of the controller for:
 - MODBUS TCP
 - BACNet IP

A cable is supplied with the unit to the external connection.

NOTES:
 1) NOT FOR CONSTRUCTION.
 2) CONNECTOR PROVIDED AT BOTTOM OF ELECTRICAL ENCLOSURE.

--- CAT5e / CAT6 as per BMS (BACNet IP)
 - - - 18 AWG Twisted and Shielded Wire (150' max),
 16 AWG (150' - 270') or 15 AWG 270' to 360')
 24 AWG min

		Blauvelt, NY Fort Worth, TX
AEGIS MII SINGLE UNIT LOW VOLTAGE		
DWN.BY <u>K.S.</u> DATE <u>030524</u> SCALE <u>NTS</u> APPD. _____ DATE _____	SD-L-1286	REV. A